

**Applications include:**

**Building & Construction**

Concrete Cure Monitoring  
Building Services

**Geotechnical**

Dam Monitoring  
Land Slip  
Mining  
Tunnels

**Scientific & Research**

Thermal Profiling  
Thermistor Arrays  
Static Load Testing

**General Industry**

Refrigeration Monitoring  
Oven Calibration  
Process Monitoring

<sup>1</sup> **FREE Software & Technical Support**

**Increased channel capacity**

Increasing the channel capacity of the *dataTaker* DT80 range is made very easy by adding *dataTaker* Channel Expansion Modules (CEM20). Each CEM20 connects 20 universal data logging channels to the *dataTaker* data logger. A *dataTaker* CEM20 connects to one analogue channel of the *dataTaker* data logger. This effectively expands the total channel capacity of the DT80 to 300 analog inputs and the DT85 to an incredible 900 inputs. Incorporating the same dual isolation technology as the DT80 range *dataTaker* data loggers each channel of the CEM20 can be used for two isolated inputs or three common reference inputs so the maximum inputs increases further.



- » Compact size
- » Cost effective method of adding analog channels to a data logger
- » Extremely low power
- » Each CEM20 multiplexes 20 analog channels into one analog channel on the data logger

**Warranty:** All *dataTaker* Data Loggers are covered by a 3 year warranty on workmanship and parts. For further information on the *dataTaker* range, or for useful downloads, visit the *dataTaker* web site at [www.datataker.com](http://www.datataker.com) or contact your nearest *dataTaker* office or distributor.

**Quality Statement:** *dataTaker* operates a Quality Management System complying with ISO9001:2000. It is *dataTaker's* policy to supply customers with products which are fit for their intended purpose, safe in use, perform reliably to published specification and are backed by a fast and efficient customer support service.

**Trademarks:** *dataTaker* is a registered trademark.

**Specifications:** *dataTaker* reserves the right to change product specifications at any time without notice. **Designed and Manufactured in Australia.**

	Four wire Isolated Input	Two wire Isolated Input	Two wire Common Reference Input
DT80	100	200	300
DT85	300	600	900

**Easy set up and connection**

Connecting a channel expansion module to a *dataTaker* data logger is very easy. The CEM20 is powered directly from the *dataTaker* data logger 12V output. Analog output connections of the CEM20 connect to a analog channel of the data logger. See sample wiring diagram shown.

**Solid construction and design**

The construction of the CEM20 is similar to the rugged *dataTaker* DT80 range. The case is made from an anodized aluminium extrusion with powder coated steel end plates. Removable screw terminals provide flexible options for installation and maintenance.

**Compatibility**

The *dataTaker* CEM20 is compatible with the following *dataTaker* data loggers: *dataTaker* DT80 Series 2, *dataTaker* DT80G Series 2, *dataTaker* DT85 Series 2 & *dataTaker* DT85G Series 2.

[www.datataker.com](http://www.datataker.com)

Proven relays from the DT80 range provides excellent isolation between channels and resistance to over volt damage. Maximum sample speed is 12Hz.

Internal RTD temperature reference allows very accurate thermocouple measurements.

Status LED indicates measurement activity and is a useful commissioning and troubleshooting aid.

Simple address configuration by 4-way DIP switch.

20 analog input channels for sensors supported by DT80 range loggers, includes thermocouples, VWSG, RTDs, 4-20mA loops, voltage, resistance, frequency etc.



**Connections to Logger**

Digital control connections: 5D & 6D in/out terminals

Power Connections: 12V & DGND twin terminals

Analog Connections: \*, +, -, #

Each CEM20 attached to a logger uses a separate 4 wire analog channel on the logger.

Maximum distance between logger and last CEM20: 100m

Maximum number of CEM20 units per data logger:

DT80 & DT80G (Series 2 only): 5

DT85 & DT85G (Series 2 only): 15

**Multiplexer**

Type: Relay multiplexer

Maximum Input Voltage: 30Vdc

Maximum Sampling Speed: 12Hz

**System**

Status LED: Sample activity

Address Selection: 4-way DIP switch. Address 1-15

**Power Supply**

Recommended: Logger's switched 12V output

Alternative: External regulated 12Vdc ± 5%

Power Consumption

Sampling: 0.36W (12V 30mA)

Idle: CEM20 is automatically turned off when not sampling.

**Physical and Environment**

Construction: Powder coated steel and anodized aluminium

Dimensions: 180 x 100 x 50mm

Weight: 0.55kg

Temperature Range: -45°C to 70°C

Humidity: 85% RH, non-condensing

**Assessories Included**

Analog and control cables for connection to the dataTaker data logger.

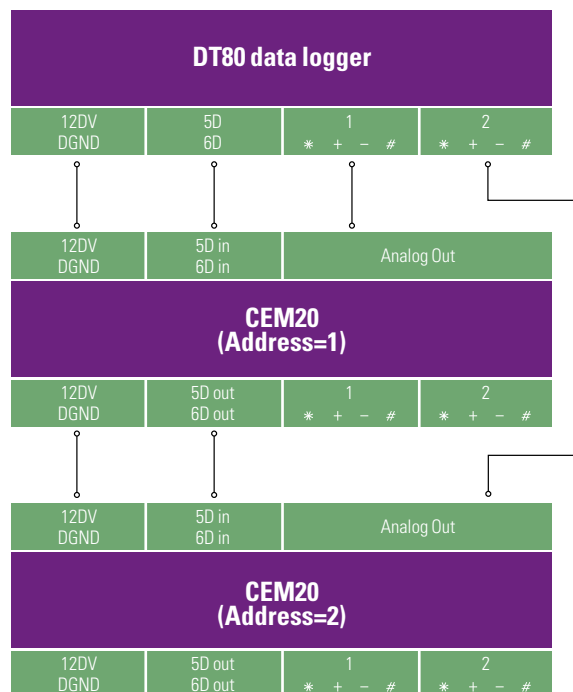


Diagram shows functional connections for DT80 data logger and two CEM20 units. Cable lengths should always be kept as short as possible to minimise noise and signal losses.

Your local distributor